



CELEX

Change for Excellence

**Lightning Protection
& Earthing Solution**

Comprehensive Lightning
Protection Systems

Practical Earthing
Solution Designs

Incomparable Sales
& Technical Support



X Bare Copper Tape



MODEL	SIZE
CTB253	25 x 3 mm
CTB256	25 x 6 mm
CTB313	31 x 3 mm
CTB386	38 x 6 mm
CTB506	50 x 6 mm

* Copper tape to BS 1432

X Tinned Copper Tape



MODEL	SIZE
CTT253	25 x 3 mm
CTT256	25 x 6 mm
CTT313	31 x 3 mm
CTT386	38 x 6 mm
CTT506	50 x 6 mm

* Copper tape to BS 1432

X PVC Covered Copper Tape



MODEL	SIZE	COLOR
CTP253GN	25 x 3 mm	Green
CTP256GN	25 x 6 mm	Green
CTP506GN	50 x 6 mm	Green
CTP253GR	25 x 3 mm	Grey
CTP256GR	25 x 6 mm	Grey
CTP506GR	50 X 6 mm	Grey

* PVC colours to BS 5252

X LSF Covered Copper Tape



MODEL	SIZE	COLOR
CTL253GN	25 x 3 mm	Green
CTL256GN	25 x 6 mm	Green
CTL506GN	50 x 6 mm	Green
CTL253GR	25 x 3 mm	Grey
CTL256GR	25 x 6 mm	Grey
CTL506GR	50 X 6 mm	Grey

* PVC colours to BS 5252

X Aluminium Tape



MODEL	SIZE
CTA253	25 x 3 mm

* Aluminium tape to BS 2898-1350

Commit to Earthing & Lightning Protection EXcellence

Bare DC Clip



MODEL	SIZE	SPECIFICATION
DCB253	25 x 3 mm	
DCB256	25 x 6 mm	
DCB313	31 x 3 mm	
DCB386	38 x 6 mm	
DCB506	50 x 6 mm	
DCBP253	25 x 3 mm	For PVC / LSF Tape
DCBP256	25 x 6 mm	For PVC / LSF Tape
DCBP506	50 x 6 mm	For PVC / LSF Tape

Tinned DC Clip



MODEL	SIZE	SPECIFICATION
DCT253	25 x 3 mm	
DCT256	25 x 6 mm	
DCT313	31 x 3 mm	
DCT386	38 x 6 mm	
DCT506	50 x 6 mm	
DCTP253	25 x 3 mm	For PVC / LSF Tape
DCTP256	25 x 6 mm	For PVC / LSF Tape
DCTP506	50 x 6 mm	For PVC / LSF Tape

PVC DC Clip



MODEL	SIZE	COLOR
DCP253GN	25 x 3 mm	Green
DCP253GR	25 x 3 mm	Grey

LSF DC Clip





MODEL	SIZE	COLOR
DCL253GN	25 x 3 mm	Green
DCL253GR	25 x 3 mm	Grey



Aluminium DC Clip



MODEL	SIZE
DCA253	25 x 3 mm

Commit to Earthing & Lightning Protection EXcellence

 Copperbond Steel Earth Rod	MODEL	DIA.	LENGTH
	ER612	Ø16 mm	1200 mm
	ER615	Ø16 mm	1500 mm
	ER618	Ø16 mm	1800 mm
	ER624	Ø16 mm	2400 mm
	ER912	Ø19 mm	1200 mm
	ER915	Ø19 mm	1500 mm
	ER918	Ø19 mm	1800 mm
ER924	Ø19 mm	2400 mm	

 Coupler for Earth Rod	MODEL	DIA.
	RP6	Ø16 mm
	RP9	Ø19 mm

 Rod to Tape Clamp	MODEL	MAX. ROD DIA.	MAX. TAPE SIZE
	RT1	Ø19mm	25 x 6 mm
	RT2	Ø16 mm	50 x 6 mm
	RT3	Ø19 mm	50 x 6 mm

 Concrete Earth Pit	MODEL
	CEP

 High Pressure Seal of Earth Rod	MODEL	SIZE
	HPS	300 x 300 mm

X Bare Square Clamp



MODEL	SIZE
SCB253	25 x 3 mm
SCB256	25 x 6 mm
SCB313	31 x 3 mm
SCB386	38 x 6 mm
SCB506	50 x 6 mm

X Tinned Square Clamp



MODEL	SIZE
SCT253	25 x 3 mm
SCT256	25 x 6 mm
SCT313	31 x 3 mm
SCT386	38 x 6 mm
SCT506	50 x 6 mm

X Aluminium Square Clamp




MODEL	SIZE
SCA253	25 x 3 mm

X Earth Point



MODEL	SPECIFICATION
EP4	Four-Hole Earth Point
EPC	Earth Point Cover Plate
EP16T	Earth Point welded to 16 mm Mild Steel Rod; T Joint
EP16S	Earth Point welded to 16 mm Mild Steel Rod; Straight Joint
EP25T	Earth Point welded to 25 mm Mild Steel Rod; T Joint
EP25S	Earth Point welded to 25 mm Mild Steel Rod; Straight Joint

X Earthing Terminal

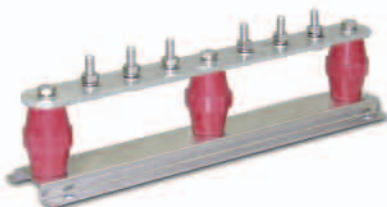

MODEL	SPECIFICATION
ET4	4 way; 300 x 50 x 6 mm
ET4-SL	4 way; 400 x 50 x 6 mm; single disconnected link
ET4-DL	4 way; 500 x 50 x 6 mm; double disconnected link
ET6	6 way; 450 x 50 x 6 mm
ET6-SL	6 way; 550 x 50 x 6 mm; double disconnected link
ET6-DL	6 way; 650 x 50 x 6 mm; double disconnected link

* Tailor-made Earthing Terminals are available.



Air Terminal



MODEL	LENGTH	DIA.	MATERIAL
AT05	500 mm	15	Copper
AT10	1000 mm	15	Copper
AT15	1500 mm	15	Copper
AT20	2000 mm	15	Copper



Air Terminal Base



MODEL	ROD DIA.	MAX. CONDUCTOR WIDTH
ATB1	15 mm	25mm



Solid Copper Plate



MODEL	SIZE
CP61	600 x 600 x 1.5 mm
CP91	900 x 900 x 1.5 mm
CP121	1200 x 1200 x 1.5 mm
CP63	600 x 600 x 3 mm
CP93	900 x 900 x 3 mm
CP123	1200 x 1200 x 3 mm
CP66	600 x 600 x 6 mm
CP96	900 x 900 x 6 mm
CP126	1200 x 1200 x 6 mm



Bare Solid Copper Conductor



MODEL	DIA.
SD8	Ø8 mm



Bare Stranded Copper Conductor



MODEL	SIZE
ST50	50 mm ²
ST70	70 mm ²
ST95	95 mm ²
ST120	120 mm ²
ST150	150 mm ²
ST185	185 mm ²

Commit to Earthing & Lightning Protection EXcellence

Flexible Copper Braid



MODEL

FCB10

FCB25

FCB35

FCB50

SIZE

15 x 1.8 mm

20 x 3.4 mm

25 x 3.7 mm

28 x 5 mm

AREA OF CONDUCTOR

10 mm²

25 mm²

35 mm²

50 mm²

**Tailor-made lengths with lugs are available.*

Aircraft Earth Receptacle



MODEL

AER 1

Oblong Test Clamp



MODEL

OTB253

OTT253

OTB386

OTT386

OTB506

OTT506

SIZE

25 x 3 mm

25 x 3 mm

38 x 6 mm

38 x 6 mm

50 x 6 mm

50 x 6 mm

Tape to Steel Structure Bond



MODEL

SB1

SBA1

MAX. TAPE WIDTH

26mm

26 mm

MATERIAL

Copper

Aluminium

Pipe Bond



MODEL

PB1

PBA1

MAX. TAPE WIDTH

26 mm

26 mm

MATERIAL

Copper

Aluminium

